

CP1260 12V 6Ah(20hr)



The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special one-way valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.

Battery Construction



| | | | | | | | | |
|--------------|----------------|----------------|-----------|-------|--------------|----------|------------|---------------|
| Component | Positive plate | Negative plate | Container | Cover | Safety valve | Terminal | Separator | Electrolyte |
| Raw material | Lead dioxide | Lead | ABS | ABS | Rubber | Copper | Fiberglass | Sulfuric acid |

General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.

Dimensions and Weight

Length(mm / inch)151 / 5.94
 Width(mm / inch)52 / 2.05
 Height(mm / inch)94 / 3.70
 Total Height(mm / inch).....99 / 3.90
 Approx. Weight(Kg / lbs)2.18 / 4.8

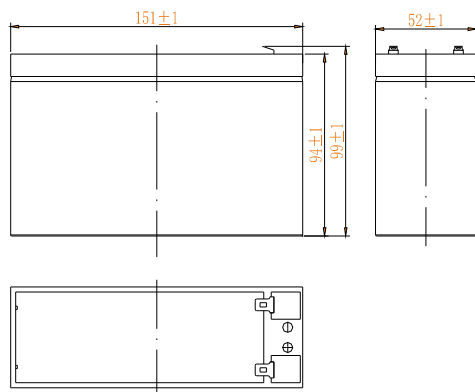

terminal
F2 (0.250)

Performance Characteristics

Nominal Voltage12V
 Number of cell6
 Design Life3-5 years
 Nominal Capacity 77°F(25°C)
 20 hour rate (0.3A, 10.5V)..... 6Ah
 10 hour rate (0.56A, 10.5V)..... 5.6Ah
 5 hour rate (1.05A, 10.5V)..... 5.25Ah
 1 hour rate (4.2A, 9.6V)..... 4.2Ah
 Internal Resistance
 Fully Charged battery 77°F(25°C)..... 18mOhms
 Self-Discharge
 3% of capacity declined per month at 20°C(average)
 Operating Temperature Range
 Discharge -20~60°C
 Charge -10~60°C
 Storage -20~60°C
 Max. Discharge Current 77°F(25°C)90A(5s)
 Short Circuit Current 300A
 Charge Methods: Constant Voltage Charge 77°F(25°C)
 Cycle use 14.5-14.9V
 Maximum charging current 2.4A
 Temperature compensation -30mV/°C
 Standby use 13.6-13.8V
 Temperature compensation -20mV/°C









Discharge Constant Current (Amperes at 77°F25°C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 1h | 3h | 5h | 10h | 20h |
|----------------------|------|-------|-------|-------|------|------|------|------|------|
| 1.60V | 28.0 | 18.0 | 14.3 | 7.99 | 4.20 | 1.78 | 1.22 | 0.63 | 0.32 |
| 1.65V | 26.6 | 17.1 | 13.8 | 7.67 | 4.08 | 1.74 | 1.15 | 0.63 | 0.32 |
| 1.70V | 25.2 | 16.2 | 13.2 | 7.35 | 3.95 | 1.70 | 1.10 | 0.60 | 0.32 |
| 1.75V | 23.7 | 15.4 | 12.6 | 7.00 | 3.75 | 1.63 | 1.05 | 0.56 | 0.30 |
| 1.80V | 21.7 | 14.0 | 12.2 | 6.78 | 3.53 | 1.60 | 1.03 | 0.51 | 0.28 |

Discharge Constant Power (Watts at 77°F25°C)

| End Point Volts/Cell | 5min | 10min | 15min | 30min | 45min | 1h | 2h | 3h | 5h |
|----------------------|------|-------|-------|-------|-------|------|------|------|------|
| 1.60V | 50.6 | 34.0 | 26.7 | 14.7 | 10.80 | 8.40 | 4.83 | 3.44 | 2.21 |
| 1.65V | 48.1 | 32.3 | 25.6 | 14.1 | 10.30 | 8.05 | 4.70 | 3.36 | 2.16 |
| 1.70V | 45.6 | 30.6 | 24.6 | 13.5 | 9.79 | 7.65 | 4.59 | 3.28 | 2.11 |
| 1.75V | 43.1 | 28.8 | 23.6 | 13.0 | 9.34 | 7.30 | 4.45 | 3.18 | 2.06 |
| 1.80V | 40.5 | 27.2 | 22.5 | 12.5 | 9.10 | 7.11 | 4.29 | 3.05 | 1.93 |

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.

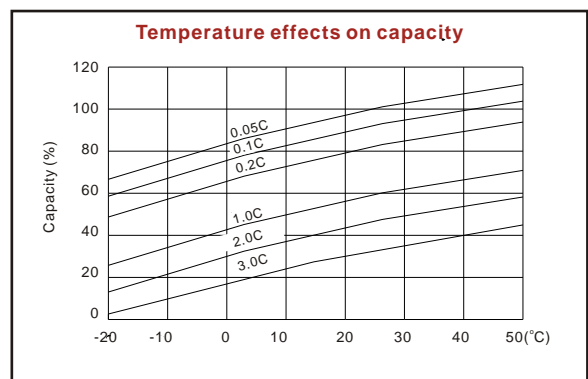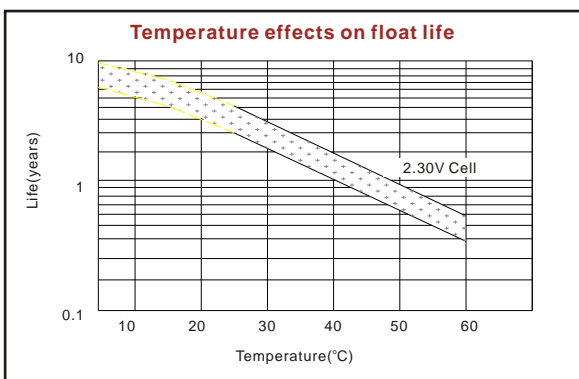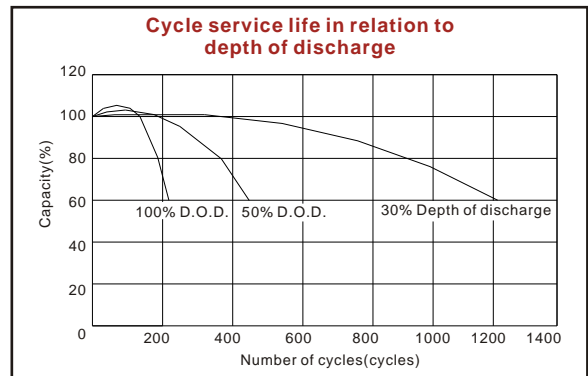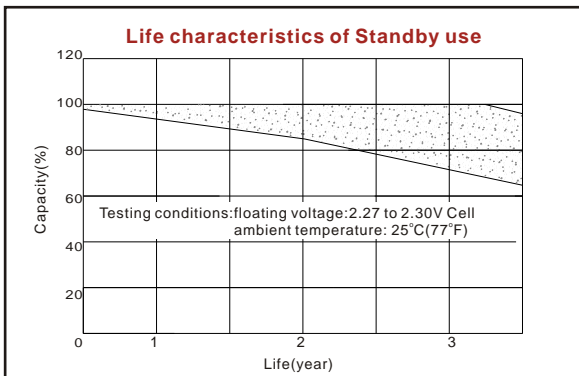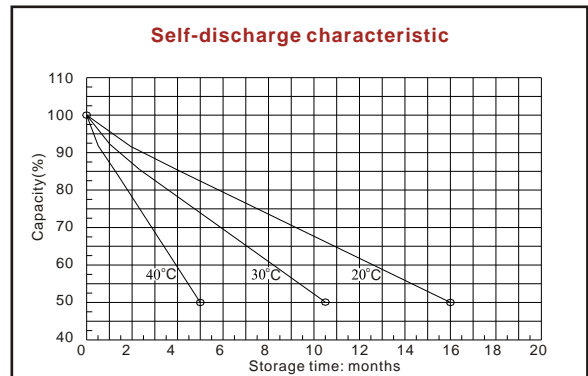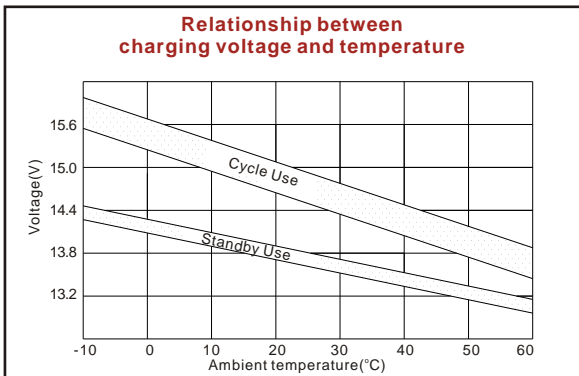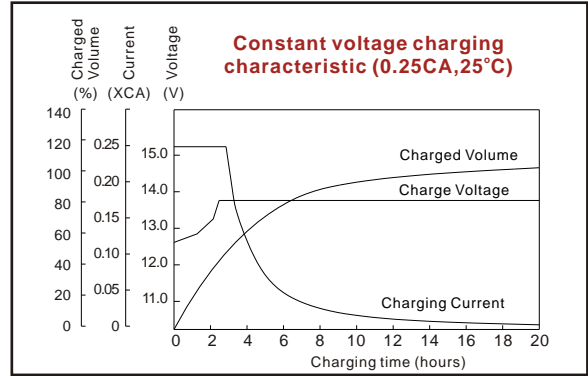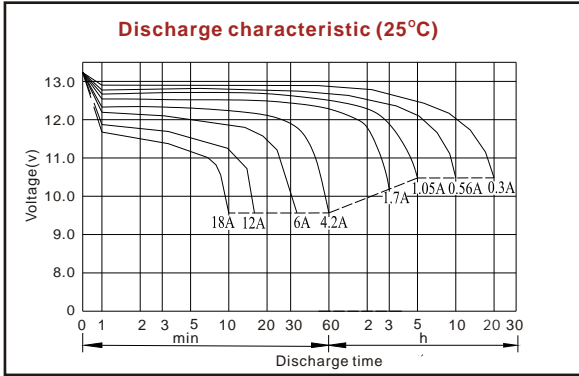

ISO9001:2000

MH25860

G4M19906-9202-E-16

www.vision-batt.com

Shenzhen Center Power Tech. Co., Ltd.
 Center Power Industrial Park, Tongfu Industrial District Dapeng Town, 518120 Shenzhen, China
 Tel: (+86-755) 8431 8088 Fax: (+86-755) 8431 8038 E-mail: sales@vision-batt.com