



Novelbat[®]

Powersports Battery

FOR:
MOTORCYCLES,
SCOOTERS,
JET SKIS,
ATVS,
SNOWMOBILES,
ETC.





Novelbat powersports batteries are constructed at a state of art manufacturing facility using the highest grade components. They must also pass strict quality control requirements to insure you receive the best built replacement battery.

CONTENTS





Production Facility	01-02
Conventional	03-04
High Performance	05-06
Maintenance Free	07-08
Sealed Activated MF	09-10
Gel Nanotechnology	11-12
Lawn Mower	13
DIN Type	14
Appendix	15-16

Novelbat[®]

Powersports Battery

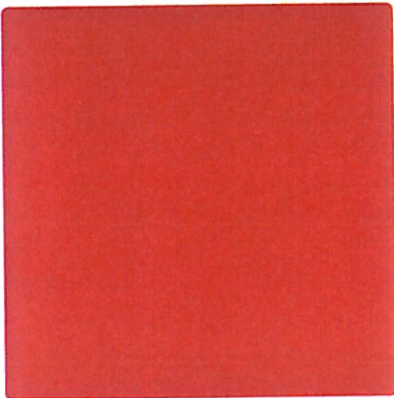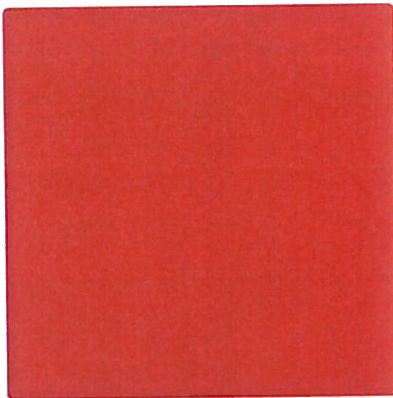

- 01 Plate Workshop
- 02 Plate Workshop
- 03 Lead Powder Milling workshop
- 04 Grid Casting
- 05 Grid Casting
- 06 Plates Conveyer Belt
- 07 Sulfuric Acid Workshop
- 08 Assembly Line
- 09 Assembly Line

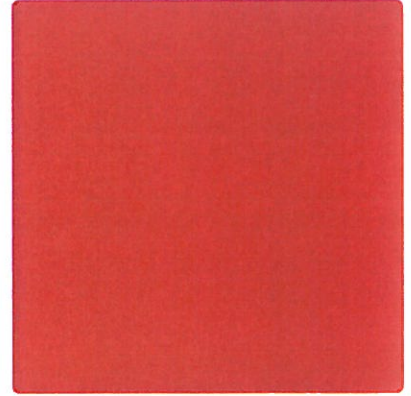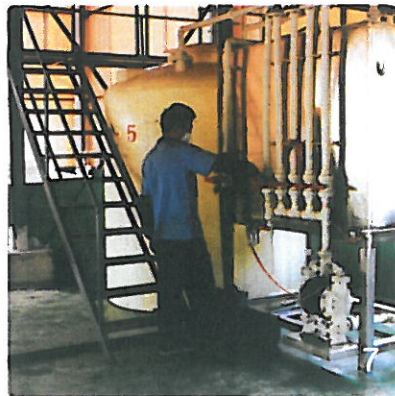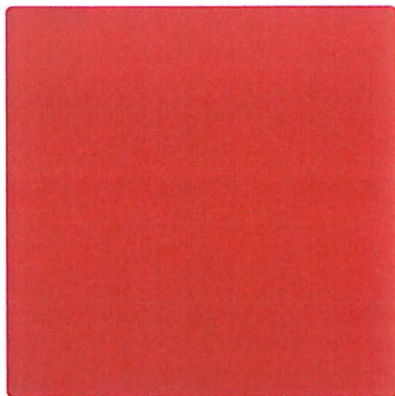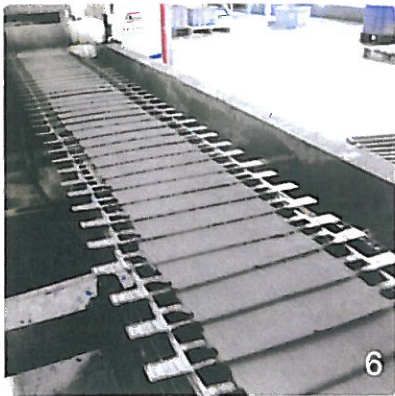


Conventional

- High Engineering Standard
- High Quality Material
- High Quality Construction
- High Cranking Power
- Wide Model Range




Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight w/o Acid (kg)	Acid Volume (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CCA★/ -18°C
		L	W	H						
(6 VOLT)										
6N2-2A	2	70	46	95	0.42	0.14	0.20		—	20
6N2-2A-1	2	70	46	95	0.42	0.14	0.20		—	20
6N2-2A-2	2	70	46	95	0.42	0.14	0.20		—	20
6N2-2A-3	2	70	46	95	0.42	0.14	0.20		—	20
6N2-2A-4	2	70	46	95	0.42	0.14	0.20		—	20
6N2-2A-8	2	70	46	95	0.42	0.14	0.20		—	20
6N2A-2C	2	70	46	103	0.42	0.15	0.20		—	20
6N2A-2C-3	2	70	46	103	0.42	0.15	0.20		—	20
6N4-2A	4	70	70	95	0.50	0.19	0.40		—	25
6N4-2A-2	4	70	70	95	0.50	0.19	0.40		—	25
6N4-2A-3	4	70	70	95	0.50	0.19	0.40		—	25
6N4-2A-4	4	70	70	95	0.50	0.19	0.40		—	25
6N4-2A-5	4	70	70	95	0.50	0.19	0.40		—	25
6N4-2A-6	4	70	70	95	0.50	0.19	0.40		—	25
6N4-2A-7	4	70	70	95	0.50	0.19	0.40		—	25
6N4A-4D	4	60	56	125	0.68	0.17	0.40		—	35
6N4A-4D-1	4	60	56	125	0.68	0.17	0.40		—	35
6N4C-1B	4	70	70	103	0.60	0.16	0.40		—	24
6N4B-2A	4	100	47	96	0.51	0.21	0.40		—	24
6N4B-2A-3	4	100	47	96	0.51	0.21	0.40		—	24
6N4B-2A-4	4	100	47	96	0.51	0.21	0.40		—	24
6N4B-2A-5	4	100	47	96	0.51	0.21	0.40		—	24
6N4.5-1D	4.5	124	50	105	0.78	0.27	0.45		5	36
6N5.5-1D	5.5	88	68	97	0.79	0.27	0.55		—	40
6N5.5-1D-1	5.5	88	68	97	0.79	0.27	0.55		—	40
6N5.5-3D	5.5	88	68	97	0.79	0.27	0.55		—	40
6N6-1B	6	99	57	110	0.80	0.27	0.60		—	48
6N6-1B-1	6	99	57	110	0.80	0.27	0.60		—	48
6N6-1C	6	99	57	110	0.80	0.27	0.60		—	48
6N6-1D	6	99	57	110	0.80	0.27	0.60		—	48
6N6-1D-1	6	99	57	110	0.80	0.27	0.60		—	48
6N6-1D-2	6	99	57	110	0.80	0.27	0.60		—	48
6N6-3B	6	99	57	110	0.83	0.27	0.60		5	48
6N6-3B-1	6	99	57	110	0.83	0.27	0.60		5	48
6N11A-3	11	121	58	130	1.47	0.42	1.10		5	88
6N11A-4	11	121	58	130	1.47	0.42	1.10		5	88
6N11A-3A	11	121	59	129	1.47	0.42	1.10		5	88
6N11A-3B	11	121	59	129	1.47	0.42	1.10		5	88
6N11A-4A	11	121	59	129	1.47	0.42	1.10		5	88
6N11A-1B	11	122	62	132	1.28	0.42	1.10		5	88
6N11-2D	11	151	71	100	1.31	0.45	1.10		5	88
6N12A-2C	12	155	56	114	1.43	0.42	1.20		5	96
6N12A-2D	12	155	56	114	1.43	0.42	1.20		5	96
6N18-1B	14	106	82	143	1.73	0.57	1.40		5	90
6N18-3B	13	122	86	140	1.70	0.60	1.30		12	104
B39-6 (6N7-1)	7	126	48	126	0.93	0.33	0.70		5	60
B38-6A	13	119	83	161	1.77	0.77	1.30		5	104
B49-6	10	91	83	160	1.40	0.54	1.00		5	80

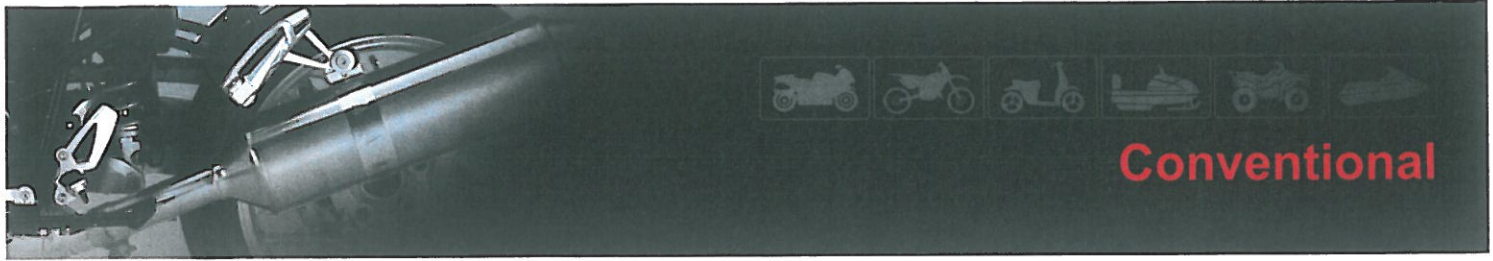

Conventional


Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight w/o Acid (kg)	Acid Volumn (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CCA★/ -18 C
		L	W	H						
(6 VOLT)										
6YB8-3B (6YB8L-B)	8	120	71	95	1.12	0.32	0.80		5	64
6YB11-2D	11	151	71	100	1.28	0.42	1.10		5	88
(12 VOLT)										
12N5-3B	5	120	60	130	1.42	0.41	0.50		5	40
12N5-4B	5	120	60	130	1.42	0.41	0.50		5	40
12N5.5A-3B	5.5	104	91	115	1.55	0.48	0.55		5	44
12N5.5-3A	5.5	139	62	128	1.55	0.48	0.55		5	60
12N5.5-4A	5.5	139	62	128	1.55	0.48	0.55		5	60
12N5.5-3B	5.5	138	61	131	1.55	0.48	0.55		5	60
12N5.5-4B	5.5	138	61	131	1.55	0.48	0.55		5	60
12N6-3A	6	136	71	94	1.45	0.34	0.60		5	60
12N6-4A (12M5-D)	6	136	71	94	1.45	0.34	0.60		5	60
12N6-3B	6	141	73	94	1.45	0.34	0.60		5	60
12N6-4B	6	141	73	94	1.45	0.34	0.60		5	60
12N6.5-3B	6.5	140	72	106	1.77	0.41	0.65		5	65
12N6.5-4B	6.5	140	72	106	1.77	0.41	0.65		5	65
12N7D-3B	7	134	76	141	1.82	0.66	0.70		5	75
12N7A-3A	7	146	60	132	1.90	0.50	0.70		5	74
12N7A-4A	7	146	60	132	1.90	0.50	0.70		5	74
12N7C-3D	8	130	90	116	2.35	0.50	0.80		1	80
12N7-3A	8	137	75	134	2.04	0.64	0.80		5	90
12N7-4A	8	137	75	134	2.04	0.64	0.80		5	90
12N7-3B	8	137	75	134	2.04	0.64	0.80		5	90
12N7-4B	8	137	75	134	2.04	0.64	0.80		5	90
12N9-3A-1	9	135	75	138	2.11	0.59	0.90		5	90
12N9-3B	9	135	75	138	2.11	0.59	0.90		5	90
12N9-4B-1	9	135	75	138	2.11	0.59	0.90		5	90
12N9-3A	9	137	75	139	2.12	0.66	0.90		8	90
12N9Y-3B	9	136	76	138	2.18	0.59	0.90		13	90
12N10-3A	10	134	90	145	2.40	0.78	1.00		5	95
12N10-3A-2	10	134	90	145	2.40	0.78	1.00		7	95
12N10-3B	10	134	90	145	2.40	0.78	1.00		5	95
12N11-3A	11	134	90	155	2.28	0.75	1.10		5	103
12N11-3A-1	11	134	90	155	2.28	0.75	1.10		7	103
12N11-3B	11	134	90	155	2.28	0.75	1.10		5	103
12N12A-4A-1	12	134	80	160	3.04	0.81	1.20		5	135
12N12-3A	12	200	75	135	2.77	0.96	1.20		5	113
12N12-3B	12	200	75	135	2.77	0.96	1.20		5	113
12N14-3A	14	134	89	164	3.68	0.90	1.40		7	128
12N14-4A	14	134	89	164	3.68	0.90	1.40		7	128
12N14-3B	14	134	89	164	3.68	0.90	1.40		7	128
12N18-3	18	206	92	160	4.02	1.47	1.80		5	164
12N18-3A	18	206	92	160	4.00	1.47	1.80		4	164
12N18-4A	18	206	92	160	4.00	1.47	1.80		4	164
12C16A-3B (12Y16A-3B)	19	185	82	170	4.64	1.08	1.90		3	150
51814	19	185	82	170	4.64	1.08	1.90		3	150
51913	19	185	82	170	4.64	1.08	1.90		3	150
52015	20	185	82	170	4.64	1.08	2.00		3	150
12N24-3	24	184	124	174	4.92	1.77	2.40		3	218
12N24-3A	24	184	124	174	4.92	1.77	2.40		3	218
12N24-4	24	184	124	174	4.92	1.77	2.40		3	218
12N24-4A	24	184	124	174	4.92	1.77	2.40		3	218

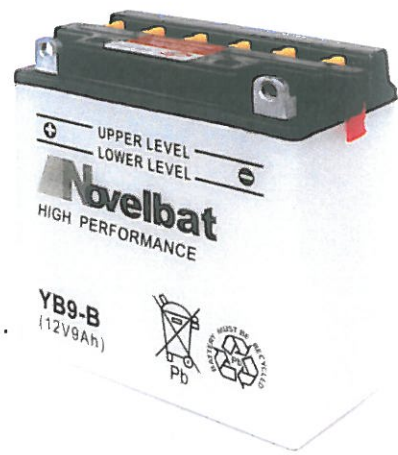

High Performance

- 20%-30% more starting power than conventional batteries.
- More plates per cell give higher cranking performance.
- Extra power for machines.

Type	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight w/o Acid (kg)	Acid Volumn (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CCA★/ -18 C
			L	W	H						
(12 VOLT)											
YB2.5L-A	YB2.5L-C	2.5	80	70	105	0.81	0.24	0.25		—	20
YB2.5L-C	YB2.5L-C	2.5	81	71	105	0.81	0.24	0.25		—	20
YB2.5L-C-1	YB2.5L-C-1	2.5	81	71	105	0.81	0.24	0.25		—	20
YB2.5L-C-2	YB2.5L-C2	2.5	81	71	105	0.81	0.24	0.25		—	20
YB3L-A	YB3L-A	3	98	56	111	1.00	0.23	0.30		5	32
YB3L-B	YB3L-B	3	98	56	111	1.00	0.23	0.30		5	32
YTX4L-B	YTX4L-BS	3.5	114	70	86	1.21	0.21	0.35		4	40
YB4L-A	YB4L-A	4	120	70	92	1.22	0.29	0.40		4	40
YB4L-B	YB4L-B	4	120	70	92	1.22	0.29	0.40		4	40
YB4HL-B	YB4L-B	5	120	70	92	1.28	0.29	0.50		4	45
YB5L-B	YB5L-B	5	120	62	129	1.41	0.40	0.50		5	50
YB5L-B2	YB5L-B2	5	120	60	130	1.47	0.39	0.50		4	50
YB5.5-A	12N5.5-4A	5.5	139	62	128	1.55	0.48	0.55		5	60
YB5.5L-A	12N5.5-3A	5.5	139	62	128	1.55	0.48	0.55		5	60
YB5.5-B	12N5.5-4B	5.5	138	61	131	1.55	0.48	0.55		5	60
YB5.5L-B	12N5.5-3B	5.5	138	61	131	1.55	0.48	0.55		5	60
YB6-A	YB6-A	6	136	71	94	1.45	0.34	0.60		5	60
YB6L-A	YB6L-A	6	136	71	94	1.45	0.34	0.60		5	60
YB6-B	YB6-B	6	141	73	94	1.45	0.34	0.60		5	60
YB6L-B	YB6L-B	6	141	73	94	1.45	0.34	0.60		5	60
YB6.5-B	YB6.5-B	6.5	140	72	106	1.77	0.41	0.65		5	65
YB6.5L-B	YB6.5L-B	6.5	140	72	106	1.77	0.41	0.65		5	65
YB7B-B	YB7B-B	7	148	60	129	1.83	0.47	0.70		5	70
YB7BL-B	YB7BL-B	7	148	60	129	1.83	0.47	0.70		5	70
YB7S-4B	YTX7A-BS	7	150	87	96	1.97	0.47	0.70		4	85
YB7C-A	YB7C-A	8	130	90	116	2.35	0.50	0.80		1	80
YB7-A	YB7-A	8	137	75	134	2.04	0.64	0.80		5	90
YB7L-A	YB7L-A	8	137	75	134	2.04	0.64	0.80		5	90
YB7-B	12N7-4B	8	137	75	134	2.04	0.64	0.80		5	90
YB7L-B	YB7L-B	8	137	75	134	2.04	0.64	0.80		5	90
YB7-A2	YB7-A2	8	136	76	131	2.08	0.66	0.80		4	90
YB7L-B2	YB7L-B2	8	136	76	131	2.08	0.66	0.80		4	90
YB7A-A	YB7A-A	8	136	76	144	2.06	0.64	0.80		5	90
YB7AL-A	YB7AL-A	8	136	76	144	2.06	0.64	0.80		5	90
YB9-A	YB9-A	9	135	75	138	2.11	0.59	0.90		5	90
YB9L-A	YB9L-A	9	135	75	138	2.11	0.59	0.90		5	90
YB9-B	YB9-B	9	135	75	138	2.11	0.59	0.90		5	90
YB9L-B	YB9L-B	9	135	75	138	2.11	0.59	0.90		5	90
YB9-A2	YB9-A2	9	136	76	138	2.09	0.66	0.90		4	90
YB9L-A2	YB9L-A2	9	136	76	138	2.09	0.66	0.90		4	90
YB9-B2	YB9-B2	9	136	76	138	2.09	0.66	0.90		4	90
YB9L-B2	YB9L-B2	9	136	76	138	2.09	0.66	0.90		4	90
YB9A-A	YB9A-A	9	136	76	149	2.14	0.66	0.90		5	90
YB10L-A	YB10L-A	11	134	90	145	2.61	0.78	1.10		5	140
YB10L-B	YB10L-B	11	134	90	145	2.61	0.78	1.10		5	140
YB10L-A2	YB10L-A2	11	134	90	145	2.61	0.78	1.10		7	140
YB10L-B2	YB10L-B2	11	134	90	145	2.61	0.78	1.10		7	140
YB10A-A	YB10A-A	11	134	90	158	2.63	0.78	1.10		5	140
YB10A-A2	YB10A-A2	11	134	90	158	2.63	0.78	1.10		7	140

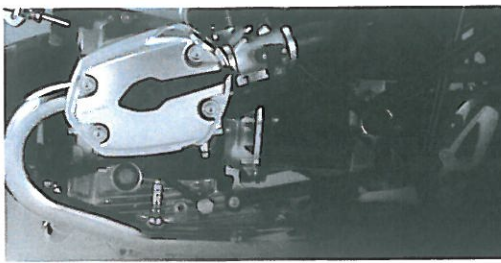

High Performance

Type	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight w/o Acid (kg)	Acid Volumn (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CCA★/ -18 C
			L	W	H						
(12 VOLT)											
YB10AL-A2	YB10AL-A2	11	134	90	158	2.63	0.78	1.10		7	140
YB12A-A	YB12A-A	12	134	80	160	3.04	0.81	1.20		5	135
YB12AL-A	YB12AL-A	12	134	80	160	3.04	0.81	1.20		5	135
YB12A-B	YB12A-B	12	134	80	160	3.04	0.81	1.20		5	135
YB12AL-A2	YB12AL-A2	12	134	80	160	3.04	0.81	1.20		7	135
YB12C-A	YB12C-A	13	135	81	176	3.17	0.81	1.30		4	135
YB12B-B2	YB12B-B2	13	161	91	131	3.22	0.78	1.30		7	145
YB14-A1	YB14-A1	14	134	89	164	3.31	0.87	1.40		1	160
YB14L-A1	YB14L-A1	14	134	89	164	3.31	0.87	1.40		1	160
YB14-A2	YB14-A2	14	134	89	164	3.31	0.87	1.40		7	160
YB14L-A2	YB14L-A2	14	134	89	164	3.31	0.87	1.40		7	160
SYB14L-A2	SYB14L-A2	14	134	89	164	3.31	0.87	1.40		7	160
YB14-B1	YB14-B1	14	134	89	164	3.31	0.87	1.40		1	160
YB14L-B1	YB14L-B1	14	134	89	164	3.31	0.87	1.40		1	160
YB14-B2	YB14-B2	14	134	89	164	3.31	0.87	1.40		7	160
YB14L-B2	YB14L-B2	14	134	89	164	3.31	0.87	1.40		7	160
SYB14L-B2	SYB14L-B2	14	134	89	164	3.31	0.87	1.40		7	160
YB14A-A1	YB14A-A1	14	134	89	176	3.33	0.87	1.40		5	160
YB14AL-A1	YB14AL-A1	14	134	89	176	3.33	0.87	1.40		5	160
YB14A-A2	YB14A-A2	14	134	89	176	3.33	0.87	1.40		7	160
HYB16A-A	HYB16A-AB	16	146	88	180	3.57	1.08	1.60		6	140
YB16AL-A2	YB16AL-A2	16	205	70	162	3.76	1.08	1.60		2	190
YB16-A	YB16-A	19	175	100	155	4.74	1.23	1.90		5	230
YB16L-A	YB16L-A	19	175	100	155	4.74	1.23	1.90		5	230
YB16-B	YB16-B	19	175	100	155	4.74	1.23	1.90		5	230
YB16L-B	YB16L-B	19	175	100	155	4.74	1.23	1.90		5	230
SYB16L-B	SYB16L-B	19	175	100	155	4.74	1.23	1.90		5	230
YB16-B-LM	YB16-B-CX	19	175	100	155	4.74	1.23	1.90		5	230
YB16HL-A-LM	YB16HL-A-CX	19	175	100	155	4.74	1.23	1.90		5	230
YB16B-A	YB16B-A	16	160	90	158	3.50	1.02	1.60		4	180
YB16B-A1	YB16B-A1	16	160	90	158	3.50	1.02	1.60		6	180
YB16C-B	YB16C-B	19	175	100	175	4.83	1.23	1.90		4	230
YB16CL-B	YB16CL-B	19	175	100	175	4.83	1.23	1.90		4	230
YB18-A	YB18-A	18	179	90	164	4.00	1.20	1.80		6	190
YB18L-A	YB18L-A	18	179	90	164	4.00	1.20	1.80		6	190
Y50-N18-A	Y50-N18-A	20	206	92	160	4.47	1.47	2.00		6	220
Y50-N18L-A	Y50-N18L-A	20	206	92	160	4.47	1.47	2.00		6	220
Y50N18L-A-LM	Y50-N18L-A-CX	20	206	92	160	4.47	1.47	2.00		6	220
SY50-N18L-A	SY50-N18L-AT	20	206	92	160	4.47	1.47	2.00		6	220
Y50-N18L-A3	Y50-N18L-A3	20	206	92	160	4.47	1.47	2.00		4	220
Y50-N18A-A	Y50-N18A-A	20	206	92	166	4.54	1.47	2.00		6	220
Y60-N24-A	Y60-N24-A	28	185	126	170	5.62	1.77	2.80		3	280
Y60-N24L-A	Y60-N24L-A	28	185	126	170	5.62	1.77	2.80		3	280
Y60-N24L-B	Y60-N24AL-B	28	185	126	170	5.62	1.77	2.80		3	280
Y60-N28L-A	52861	28	185	126	170	5.62	1.77	2.80		3	280
Y60-N30-A	53034	28	185	126	170	5.70	1.77	2.80		3	280
Y60-N30L-A		28	185	126	170	5.70	1.77	2.80		3	280
Y60-N30L-B	53030	28	185	126	170	5.70	1.77	2.80		3	280
YHD4-12	YHD-12H	28	205	132	165	5.99	2.00	2.80		8	280
YB30L-B	YB30L-B	30	168	132	176	6.74	1.74	3.00		4	300
YB30CL-B	YB30CL-B	30	168	132	192	7.09	1.74	3.00		4	300
Y60-N35-A		32	232	130	165	6.05	2.34	3.20		3	320
Y60-N35L-A	53211	32	232	130	165	6.05	2.34	3.20		3	320

Maintenance Free

Each valve regulated lead acid battery is supplied with an easy-fill acid pack for activation. Once activated, they are totally sealed, eliminate spills and leakage. No further maintenance is required. The unique gas recombination system remarkably prolongs battery life in addition to stronger cranking performance.



Type	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight w/o Acid (kg)	Acid Volumn (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CCA★/ -18°C
			L	W	H						
(12 VOLT)											
YB2.5L-BS	YB2.5L-C	2.5	80	71	103	0.79	0.19	0.25		—	25
YB3L-BS	YB3L-B	3	99	57	108	0.98	0.19	0.30		5	32
YB4L-BS	YB4L-B	4	120	70	92	1.42	0.23	0.40		4	50
YB5L-BS	YB5L-B	5	120	61	128	1.44	0.33	0.50		4	50
YB7B-BS	YB7B-B	7	147	59	130	1.84	0.41	0.70		5	70
YB7-BS	YB7-A,YB7-B	7	135	75	130	1.90	0.41	0.70		5	70
YB9-BS	YB9-B	9	135	76	137	2.25	0.50	0.90		5	90
YB9L-BS	YB9L-B	9	135	76	137	2.25	0.50	0.90		5	90
Y50-N18L-BS	Y50-N18L-A	20	205	87	162	5.61	1.12	2.00		4	240
YB30CL-BS	YB30CL-B	30	168	132	192	7.97	1.62	3.00		4	300
YTX53030-BS▲	53030	30	186	130	170	7.25	1.65	3.00		3	300
YTR4A-BS	YTR4A-BS	2.3	113	48	85	0.83	0.13	0.23		10	30
YT4B-BS	YT4B-BS	2.3	113	39	85	0.78	0.12	0.23		11	30
YT4L-BS	YT4L-BS	3	114	70	85	1.11	0.19	0.30		4	40
YTX4L-BS	YTX4L-BS	3	114	70	85	1.11	0.19	0.30		4	40
YT5L-BS	YT5L-BS	4	114	70	105	1.50	0.26	0.40		4	55
YTX5L-BS	YTX5L-BS	4	114	70	105	1.50	0.26	0.40		4	55
YTX6.5-BS	YTX6.5-BS	6.5	139	66	102	1.87	0.31	0.65		5	60
YTX6.5L-BS	YTX6.5L-BS	6.5	139	66	102	1.87	0.31	0.65		5	60
YTX7-BS	YTX7-BS	6	114	70	130	2.02	0.36	0.60		4	75
YTX7L-BS	YTX7L-BS	6	114	70	130	2.02	0.36	0.60		4	75
YTX7A-BS	YTX7A-BS	6	150	87	93	1.97	0.37	0.60		4	85
YTX9-BS	YTX9-BS	8	150	87	105	2.42	0.44	0.80		4	90
YTX9L-BS	YTX9L-BS	8	150	87	105	2.42	0.44	0.80		4	90
YTR9-BS	YTR9-BS	8	150	87	106	2.42	0.44	0.80		9	120
YTX12-BS	YTX12-BS	10	151	87	130	2.97	0.58	1.00		4	160
YTX12L-BS	YTX12L-BS	10	151	87	130	2.97	0.58	1.00		4	160
YTX12A-BS	YT12A-BS	10	150	87	106	2.56	0.49	1.00		9	120
YTX14-BS	YTX14-BS	12	151	87	146	3.54	0.71	1.20		4	180
YTX14L-BS	YTX14L-BS	12	151	87	146	3.54	0.71	1.20		4	180
YTX14H-BS	YTX14H-BS	12	151	87	146	3.57	0.68	1.20		4	200
YTX14AH-BS	YTX14AH-BS	13	134	89	166	3.59	0.64	1.30		7	160
YTX14AHL-BS	YTX14AHL-BS	13	134	89	166	3.59	0.64	1.30		7	160
YTX15-BS	YTX15-BS	13	175	87	130	4.23	0.70	1.30		4	180
YTX15L-BS	YTX15L-BS	13	175	87	130	4.23	0.70	1.30		4	180
YTX16-BS	YTX16-BS	14	151	87	158	3.95	0.73	1.40		4	200
YTX16L-BS	YTX16L-BS	14	151	87	158	3.95	0.73	1.40		4	200
YTX16-BS-1	YTX16-BS-1	14	151	87	158	3.95	0.73	1.40		1	200
YTX16L-BS-1	YTX16L-BS-1	14	151	87	158	3.95	0.73	1.40		1	200
YTX20CH-BS	YTX20A-BS	18	150	87	161	4.37	0.87	1.80		9	220
YTX18-BS	YTX18-BS	20	205	87	162	5.61	1.12	2.00		4	240
YTX18L-BS	YTX18L-BS	20	205	87	162	5.61	1.12	2.00		4	240
YTX19-BS	YB16-B	19	175	100	155	5.27	0.96	1.90		4	190
YTX19L-BS	YB16L-B	19	175	100	155	5.27	0.96	1.90		4	190

Maintenance Free


Type	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight w/o Acid (kg)	Acid Volume (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CCA★/ -18°C
			L	W	H						
(12 VOLT)											
YTX19CL-BS	YB16CL-B	21	175	100	175	5.91	1.14	2.10		4	210
YTX20-BS	YTX20-BS	18	175	87	155	4.69	0.89	1.80		4	210
YTX20L-BS	YTX20L-BS	18	175	87	155	4.69	0.89	1.80		4	210
YTX20H-BS	YTX20H-BS	18	175	87	155	4.60	0.89	1.80		4	250
YTX20HL-BS	YTX20HL-BS	18	175	87	155	4.60	0.89	1.80		4	250
YTX24HL-BS	YTX24HL-BS	24	205	87	162	6.31	1.14	2.40		4	300
YIX30-BS	YIX30	30	168	127	177	7.18	1.50	3.00		4	280
YIX30L-BS	YIX30L	30	168	127	177	7.18	1.50	3.00		4	280
YIX50-BS	YIX50-BS	20	205	87	162	5.61	1.12	2.00		4	240
YIX50L-BS	YIX50L-BS	20	205	87	162	5.61	1.12	2.00		4	240
YT7B-BS	YT7B-BS	5.5	150	65	93	1.69	0.33	0.55		9	70
YT9B-BS	YT9B-BS	7.5	150	69	105	2.08	0.42	0.75		9	80
YT12B-BS	YT12B-BS	10	150	69	130	2.63	0.54	1.00		9	110
YT14B-BS	YT14B-BS	11.5	150	69	145	3.00	0.60	1.15		9	135
YTZ5-BS	YTZ5S	4	114	70	85	1.19	0.20	0.40		4	45
YTZ6-BS	YTZ6S	5	114	70	105	1.55	0.29	0.50		4	55
YTZ7-BS	YTZ7S	5.5	114	70	105	1.55	0.26	0.55		4	60
YTZ10-BS	YTZ10S	8.5	150	87	95	2.59	0.44	0.85		9	130
YTZ12-BS	YTZ12S	11	150	87	110	3.13	0.53	1.10		9	140
YTZ14-BS	YTZ14S	11.3	150	87	110	3.13	0.53	1.13		9	140

▲ 20 hour rate

Novelbat®

Sealed Activated MF

Acid is completely absorbed into glass mat separators which are sandwiched between lead plates. It's a factory activated sealed and maintenance free design.

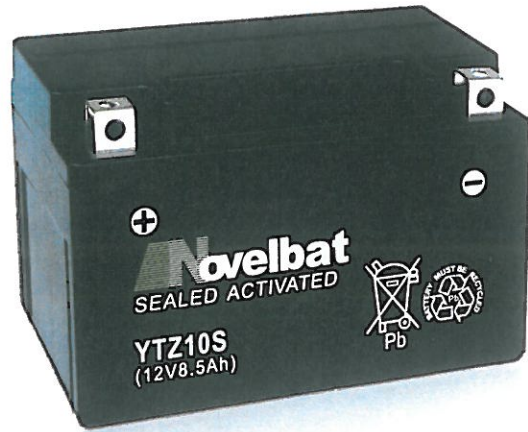

Model No.	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight (kg)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CA☆	CCA★/ -18°C
			L	W	H						
(6 VOLT)											
SLA-6N4-2A	6N4-2A	4	71	71	94	0.83	0.40		—	50	25
SLA-6N6-3B	6N6-3B	6	98	56	116	1.18	0.60		5	100	50
SLA-6N11A-3A	6N11A-3A	11	119	59	128	1.90	1.10		5	200	100
SLA-6-12B		12	105	77	140	2.05	1.20		5	200	100
(12 VOLT)											
SLA-YB2.5L-C	YB2.5L-BS	2.5	81	71	105	1.11	0.25		—	75	25
SLA-YB3L-A	YB3L-A	3	98	56	109	1.28	0.30		5	120	30
SLA-YB4L-B	YB4L-B	4	120	71	91	1.65	0.40		4	170	45
SLA-YB5L-B	YB5L-B	5	120	60	128	1.91	0.50		5	120	50
SLA-12N5.5-3B	12N5.5-3A/12N5.5-3B	6.5	135	60	130	2.31	0.65		4	175	70
SLA-12N6.5-4B	12N6.5-4B	6.5	139	66	101	2.29	0.65		5	215	70
SLA-12N6.5-3B	12N6.5-3B	6.5	139	66	101	2.29	0.65		5	215	70
SLA-YB7BL-B	YB7BL-B	7	149	60	130	2.49	0.70		5	180	80
SLA-YB7B-B	YB7B-B	7	149	60	130	2.49	0.70		5	180	80
SLA-YB7B-B2		7	149	60	130	2.43	0.70		4	160	80
SLA-YB7C-A	YB7C-A	8	129	89	114	2.89	0.80		1	210	80
SLA-YB7-A	YB7-A	8	136	76	130	2.66	0.80		5	195	70
SLA-YB7L-A	YB7L-A	8	136	76	130	2.66	0.80		5	195	70
SLA-YB9L-B	YB9L-B	9	136	76	139	2.95	0.90		5	160	95
SLA-YB9-B	YB9-B	9	136	76	139	2.95	0.90		5	160	95
SLA-YB10L-A2	YB10L-A2/YB10L-B2	10	135	90	146	4.01	1.00		9	250	150
SLA-YB10A-A2	YB10A-A2	11	134	88	155	4.06	1.10		9	300	140
SLA-YB12AL-A	YB12AL-A	12	134	80	161	4.35	1.20		5	230	120
SLA-YB12A-A	YB12A-A/12N12A-4A1	12	134	80	161	4.35	1.20		5	230	120
SLA-YB12A-A2	YB12A-A2	12	134	80	161	4.20	1.20		4	250	140
SLA-YB12AL-A2	YB12AL-A2	12	134	80	161	4.20	1.20		4	250	140
SLA-YB14-A2	YB14-A2	14	135	89	160	4.43	1.40		7	340	160
SLA-YB14L-A2	YB14L-A2/12N14	14	135	89	160	4.43	1.40		7	340	160
SLA-YB14A-A1	YB14A-A1	14	135	89	170	4.44	1.40		5	340	160
SLA-YB14A-A2	YB14A-A2	14	135	89	170	4.44	1.40		7	340	160
SLA-YB14AL-A2	YB14AL-A2	14	135	89	170	4.44	1.40		7	340	160
SLA-YB16AL-A2	YB16AL-A2	16	205	70	162	5.70	1.60		6	265	160
SLA-HYB16A-AB	HYB16A-AB	16	150	90	180	4.98	1.60		6	250	120
SLA-51913	51913	19	183	79	171	5.97	1.90		3	325	170
SLA-Y50-N18-A	Y50-N18-A	20	205	87	162	7.11	2.00		6	400	230
SLA-Y50-N18A-A	Y50-N18A-A	20	205	87	166	7.11	2.00		6	400	230
SLA-Y50-N18L-A	Y50-N18L-A	20	205	87	162	7.11	2.00		6	400	230
SLA-Y50-N18L-A3	Y50-N18L-A3	20	205	87	162	7.11	2.00		4	400	230
SLA-YB30CL-B	YB30CL-B	30	168	132	192	10.63	3.00		9	505	280
SLA-YTR4A-BS	YTR4A-BS	2.5	110	47	85	1.05	0.25		10	100	30
YT4B-5	YT4B-BS/YT4B-5	2.3	113	39	86	0.95	0.23		11	80	30
SLA-YTX4L-BS	YTX4L-BS	4	114	70	85	1.41	0.40		4	130	40
SLA-YTX5L-BS	YTX5L-BS	4	114	69	109	1.93	0.40		4	160	55
SLA-YTX7L-BS	YTX7L-BS	6	114	69	134	2.58	0.60		4	195	75
SLA-YTX7A-BS	YTX7A-BS	6	151	87	95	2.55	0.60		4	175	85
SLA-YTX9-BS	YTX9-BS	8	151	87	107	3.14	0.80		4	215	90







































Sealed Activated MF


Model No.	Same Dimensions as YUASA Type	Capacity Ah/10HR	Dimensions (±1mm)			Weight (kg)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CA☆	CCA★/ -18°C
			L	W	H						
SLA-YTX9L-BS	YTX9L-BS	8	151	87	107	3.14	0.80		4	215	90
SLA-YTX12A-BS	YT12A-BS	10	151	87	105	3.29	1.00		9	245	120
SLA-YTX12-BS	YTX12-BS	10	151	87	131	3.86	1.00		4	255	100
SLA-YTX12L-BS	YTX12L-BS	10	151	87	131	3.86	1.00		4	255	100
SLA-YTX14-BS	YTX14-BS	12	151	87	146	4.58	1.20		4	250	120
SLA-YTX14L-BS	YTX14L-BS	12	151	87	146	4.58	1.20		4	250	120
SLA-YTX15-BS	YTX15-BS	14	175	87	130	5.11	1.40		4	320	180
SLA-YTX15L-BS	YTX15L-BS	14	175	87	130	5.11	1.40		4	320	180
SLA-YTX16-BS	YTX16-BS	14	151	87	161	5.11	1.40		4	250	140
SLA-YTX16L-BS	YTX16L-BS	14	151	87	161	5.11	1.40		4	250	140
SLA-YTX18-BS	YTX18-BS	20	205	87	162	7.11	2.00		4	420	230
SLA-YTX18L-BS	YTX18L-BS	20	205	87	162	7.11	2.00		4	420	230
SLA-YTX19-BS	YB16-B	19	175	100	155	6.54	1.90		4	400	190
SLA-YTX19L-BS	YB16L-B	19	175	100	155	6.54	1.90		4	400	190
SLA-YTX19CL-BS	YB16CL-B	21	175	100	175	7.49	2.10		4	415	210
SLA-YTX20CH-BS	YTX20CH-BS	18	151	87	161	5.71	1.80		9	295	180
SLA-YTX20-BS	YTX20-BS	18	175	87	155	6.05	1.80		4	400	210
SLA-YTX20L-BS	YTX20L-BS	18	175	87	155	6.05	1.80		4	400	210
SLA-YTX20H-BS	YTX20H-BS	20	175	87	155	6.34	2.00		9	400	250
SLA-YTX20HL-BS	YTX20HL-BS	20	175	87	155	6.34	2.00		9	400	250
SLA-YTX24HL-BS	YTX24HL-BS	24	205	87	162	7.89	2.40		4	495	300
SLA-YIX30-BS	YIX30-BS	28	168	127	177	9.00	2.80		4	500	280
SLA-YIX30L-BS	YIX30L-BS	28	168	127	177	9.00	2.80		4	500	280
SLA-53030	53030	28	178	123	166	8.52	2.80		3	400	280
SLA-53034	53034	28	178	123	166	8.52	2.80		3	400	280
BS1225	BS1225	2.5	112	88	69	1.18	0.25		—	45	25
BS1225L	BS1225L	3	223	44	69	1.19	0.30		—	45	25
FBT19	FBT19	3	112	57	81	1.30	0.30		—	55	30
FHD1230	FHD1230	3	112	57	81	1.30	0.30		—	55	30
SLA-12-18	SLA12-18	18	181	77	167	5.90	1.80		15	280	160
NH1220L	SLA12-22L	20	196	130	180	7.15	2.00		12	325	180
NH1220R	SLA12-22R	20	196	130	180	7.15	2.00		12	325	180
SLA-12-22L	SLA12-22L	22	196	130	180	8.33	2.20		12	305	200
SLA-12-22R	SLA12-22R	22	196	130	180	8.33	2.20		12	305	200
SLA-12-32L	SLA12-32L	32	196	130	180	9.82	3.20		12	575	320
SLA-12-32R	SLA12-32R	32	196	130	180	9.82	3.20		12	575	320
YT7B-4	YT7B-BS	6	150	65	92	2.42	0.60		9	230	85
YT9B-4	YT9B-BS	8	150	69	105	2.93	0.80		9	280	100
YT12B-4	YT12B-BS	10	150	69	130	3.67	1.00		9	280	115
YT14B-4	YT14B-BS	12	150	69	145	4.23	1.20		9	270	135
YTZ3S	YTZ5S	3	114	70	85	1.39	0.30		4	120	30
YTZ5S	YTZ5S	4	114	71	86	1.79	0.40		9	150	50
YTZ6S	YTZ6S	5	110	68	110	2.16	0.50		9	170	50
YT6B-3	YT6B-3	5	114	71	106	2.27	0.50		9	170	75
YTZ7S	YTZ7S	6	114	71	106	2.27	0.60		9	210	75
YTZ10S	YTZ10S	8.5	151	87	94	3.24	0.85		9	285	130
YTZ12S	YTZ12S	11	151	87	110	3.91	1.10		9	340	140
YTZ14S	YTZ14S	11.3	151	87	110	3.91	1.13		9	340	140

Gel Nanotechnology

Gel battery is a kind of completely sealed, activated units with electrolyte pre-filled when supplied. Superior to wet charged batteries, gel batteries are filled with unique gel electrolyte which makes the battery easy and safe to use. Batteries with gel electrolyte are more vibration-resistant than other types of batteries, more environment-friendly by eliminating spills and corrosion, and have less evaporation which is a constant problem for traditional wet charged batteries.



Model No.	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight (kg)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CA☆	CCA★/ -18°C
			L	W	H						
(6 VOLT)											
GEL-6N4-2A	6N4-2A	4	71	71	94	8.37	0.40		—	55	25
GEL-6N11A-3A	6N11A-3A	11	119	59	128	1.92	1.10		5	190	100
(12 VOLT)											
GEL-YB2.5L-C	YB2.5L-C	2.5	81	71	105	1.13	0.25		—	50	20
GEL-YB3L-A	YB3L-A	3	98	56	109	1.30	0.30		5	100	30
GEL-YB4L-B	YB4L-B	4	120	71	91	1.66	0.40		4	150	40
GEL-YB5L-B	YB5L-B	5	120	60	128	1.93	0.50		5	120	60
GEL-12N5.5-3B	12N5.5-3A, 12N5.5-3B	6.5	135	60	130	2.33	0.65		4	165	75
GEL-12N6.5-3B	12N6.5-3B	6.5	139	66	101	2.32	0.65		5	215	60
GEL-YB7BL-B	YB7BL-B	7	149	60	130	2.53	0.70		5	160	65
GEL-YB7B-B	YB7B-B	7	149	60	130	2.53	0.70		5	160	65
GEL-YB7B-B2	YB7B-B	7	149	60	130	2.45	0.70		4	160	85
GEL-YB7C-A	YB7C-A	8	129	89	114	2.92	0.80		1	200	80
GEL-YB7-A	YB7-A, YB7-B	9	135	75	135	3.71	0.90		9	230	100
GEL-YB7L-A	YB7L-A, YB7L-B	9	135	75	135	3.71	0.90		9	230	100
GEL-YB9L-B	YB9L-B/12N9-3B	10	135	75	139	3.73	1.00		9	230	100
GEL-YB9-B	YB9-B/12N9-4B-1	10	135	75	139	3.73	1.00		9	230	100
GEL-YB10-A2	YB10-A2	10	135	90	146	4.05	1.00		4	245	140
GEL-YB10L-A2	YB10L-A2/YB10L-B2	11	134	88	145	4.07	1.10		9	300	140
GEL-YB10A-A2	YB10A-A2	11	134	88	155	4.10	1.10		9	300	140
GEL-YB10AL-A2	YB10AL-A2	11	134	88	155	4.10	1.10		9	300	140
GEL-YB12AL-A	YB12AL-A	12	134	80	161	4.39	1.20		5	215	120
GEL-YB12A-A	YB12A-A	12	134	80	161	4.39	1.20		5	215	120
GEL-YB12A-A2	YB12A-A2	12	134	80	161	4.25	1.20		4	245	140
GEL-12C-A	YB12C-A	12	134	80	176	4.27	1.20		4	245	140
GEL-YB12AL-A2	YB12AL-A2	12	134	80	161	4.25	1.20		4	245	140
GEL-YB14-A2	YB14-A2	14	134	88	166	4.63	1.40		9	300	160
GEL-YB14L-A2	YB14L-A2	14	134	88	166	4.63	1.40		9	300	160
GEL-YB14A-A1	YB14A-A1	14	135	89	170	4.51	1.40		5	335	140
GEL-YB14A-A2	YB14A-A2	14	134	88	176	4.65	1.40		9	300	160
GEL-YB14AL-A2	YB14AL-A2	14	134	88	176	4.65	1.40		9	300	160
GEL-YB16AL-A2	YB16AL-A2	16	205	70	162	5.75	1.60		6	300	160
GEL-HYB16A-AB	HYB16A-AB	16	150	90	180	5.02	1.60		6	240	120
GEL-51913▲	51913	19	183	79	171	6.04	1.90		3	325	170
GEL-Y50-N18-A	Y50-N18-A	20	205	87	162	7.18	2.00		6	380	200
GEL-Y50-N18A-A*	Y50-N18A-A	20	205	87	166	7.18	2.00		6	380	200
GEL-Y50-N18L-A	Y50-N18L-A	20	205	87	162	7.18	2.00		6	380	200
GEL-Y50-N18L-A3	Y50-N18L-A3	20	205	87	162	7.18	2.00		4	380	200
GEL-YB30CL-B	YB30CL-B	30	168	132	192	10.79	3.00		9	490	280

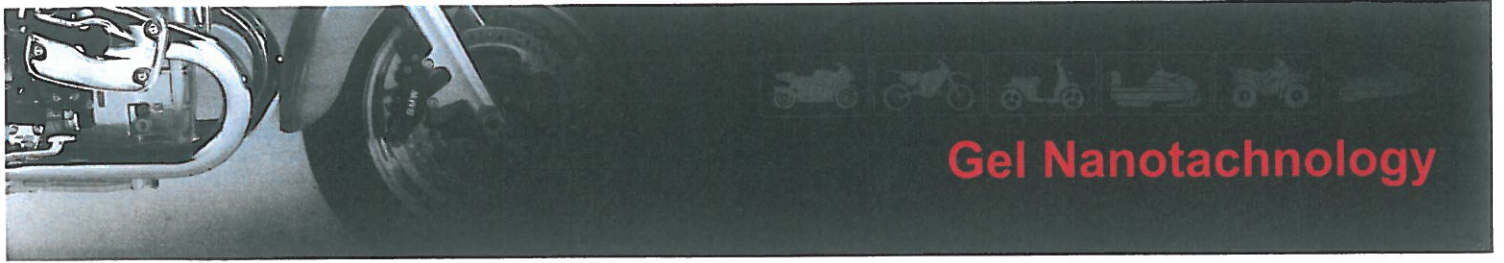


Gel Nanotechnology

Model No.	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight (kg)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CA☆	CCA★/ -18°C
			L	W	H						
(12 VOLT)											
GEL-YTR4A-BS	YTR4A-BS	2.5	110	47	85	1.06	0.25		10	100	30
GEL-YT4B-5	YT4B-BS/YT4B-5	2.3	113	39	86	0.96	0.23		11	80	25
GEL-YTX4L-BS	YTX4L-BS	4	114	70	85	1.42	0.40		4	125	40
GEL-YTX5L-BS	YTX5L-BS	6	114	71	106	2.16	0.60		9	150	65
GEL-YTX7L-BS	YTX7L-BS	7	114	71	130	2.64	0.70		9	165	80
GEL-YTX7A-BS	YTX7A-BS	7	151	87	94	2.88	0.70		9	235	85
GEL-YTX9-BS	YTX9-BS	9	151	87	105	3.50	0.90		9	240	90
GEL-YTX9L-BS	YTX9L-BS	9	151	87	105	3.50	0.90		9	240	90
GEL-YTX12A-BS	YTX12A-BS	10	151	87	105	3.32	1.00		9	245	120
GEL-YTX12-BS	YTX12-BS	12	151	87	130	4.39	1.20		9	260	120
GEL-YTX12L-BS	YTX12L-BS	12	151	87	130	4.39	1.20		9	260	120
GEL-YTX14-BS	YTX14-BS	14	151	87	145	4.99	1.40		9	270	150
GEL-YTX14L-BS	YTX14L-BS	14	151	87	145	4.99	1.40		9	270	150
GEL-YTX15-BS	YTX15-BS	14	175	87	130	5.18	1.40		4	260	180
GEL-YTX15L-BS	YTX15L-BS	14	175	87	130	5.18	1.40		4	260	180
GEL-YTX16-BS-1	YTX16-BS-1	14	151	87	161	5.15	1.40		1	245	140
GEL-YTX16-BS	YTX16-BS	16	151	87	161	5.96	1.60		9	250	160
GEL-YTX16L-BS	YTX16L-BS	16	151	87	161	5.96	1.60		9	250	160
GEL-YTX20CH-BS	YTX20CH-BS	18	151	87	161	5.77	1.80		9	275	180
GEL-YTX18-BS	YTX18-BS	20	205	87	162	7.18	2.00		4	380	230
GEL-YTX18L-BS	YTX18L-BS	20	205	87	162	7.18	2.00		4	380	230
GEL-YTX19-BS	YB16-B	19	175	100	155	6.61	1.90		4	380	190
GEL-YTX19L-BS	YB16L-B	19	175	100	155	6.61	1.90		4	380	190
GEL-YTX19CL-BS	YB16CL-B	21	175	100	175	7.57	2.10		4	390	210
GEL-YTX20-BS	YTX20-BS	20	175	87	155	6.58	2.00		9	380	200
GEL-YTX20L-BS	YTX20L-BS	20	175	87	155	6.58	2.00		9	380	200
GEL-YTX20H-BS	YTX20H-BS	20	175	87	155	6.40	2.00		9	400	250
GEL-YTX20HL-BS	YTX20HL-BS	20	175	87	155	6.40	2.00		9	400	250
GEL-YTX24HL-BS	YTX24HL-BS	24	205	87	162	7.97	2.40		4	470	300
GEL-YIX30-BS	YIX30-BS	30	168	127	177	9.31	3.00		4	480	300
GEL-YIX30L-BS	YIX30L-BS	30	168	127	177	9.31	3.00		4	480	300
GEL-53030	53030	28	178	123	166	8.64	2.80		3	390	280
GEL-53034	53034	28	178	123	166	8.64	2.80		3	390	280
GEL-BS1225	BS1225	2.5	112	88	69	1.19	0.25		—	50	25
GEL-BS1225L	BS1225L	3	223	44	69	1.22	0.30		—	50	25
GEL-FBT19	FBT19	3	112	57	81	1.41	0.30		—	55	30
GEL-FHB1230	FHD1230	3	112	57	81	1.41	0.30		—	55	30
GEL-12-18	SLA12-18	18	181	77	167	5.97	1.80		15	270	160
GEL-NH1222L	SLA12-22L	22	196	130	180	8.43	2.20		12	360	200
GEL-NH2222R	SLA12-22R	22	196	130	180	8.43	2.20		12	360	200
GEL-12-32L	SLA12-32L	32	196	130	180	9.94	3.20		12	575	320
GEL-12-32R	SLA12-32R	32	196	130	180	9.94	3.20		12	575	320
GEL-YT7B-4	YT7B-4	6	150	65	92	2.44	0.60		9	200	60
GEL-YT9B-4	YT9B-4	8	150	69	105	2.96	0.80		9	245	75
GEL-YT12B-4	YT12B-4	10	150	69	130	3.71	1.00		9	260	95
GEL-YT14B-4	YT14B-4	12	150	69	145	4.27	1.20		9	280	110
GEL-YTZ5S	YTZ5S	4	114	71	86	1.79	0.40		9	140	40
GEL-YTZ6S	YTZ6S	5	110	68	110	2.22	0.5		9	160	50
GEL-YTZ7S	YTZ7S	6	114	71	106	2.29	0.60		9	170	65
GEL-YTZ10S	YTZ10S	8.5	151	87	94	3.27	0.85		9	280	100
GEL-YTZ12S	YTZ12S	11	151	87	110	3.95	1.10		9	320	115
GEL-YTZ14S	YTZ14S	11.3	151	87	110	3.98	1.13		9	320	118

▲ 20 hour rate

* With spacer 4mm thickness.

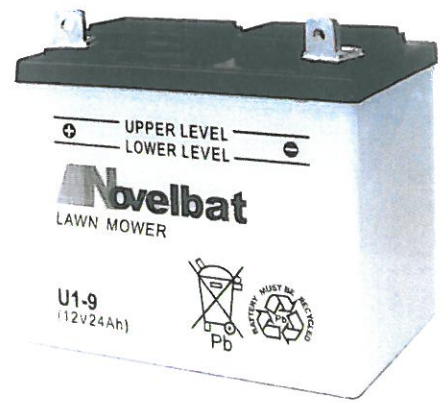

Lawn Mower

Designed with 4-season power for small engine needs. Get fresh battery that is the right fit for your tractor or utility vehicle.

Model No.	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight (kg)	Acid Volume (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CA☆	CCA★/ -18°C
			L	W	H							
(12 VOLT)												
Conventional Lawn Mower Battery												
U1-7	U1-42	18	196	130	184	4.11	2.16	1.80		12	—	150
U1-R7	U1R-42	18	196	130	184	4.11	2.16	1.80		12	—	150
U1-9	U1-54	24	196	130	184	4.71	2.10	2.40		12	—	200
U1-R9	U1R-54	24	196	130	184	4.71	2.10	2.40		12	—	200
U1-32	U1-11	32	196	130	184	6.03	2.04	3.20		12	—	280
U1-R32	U1R-11	32	196	130	184	6.03	2.04	3.20		12	—	280
U1-1		24	207	131	186	6.20	2.01	2.40		12	—	230
U1-R1		24	207	131	186	6.20	2.01	2.40		12	—	230
U1-3		32	195	131	186	7.12	1.98	3.20		12	—	340

DIN Type

Model No.	Same Dimensions as YUASA Type	Capacity 10HR(Ah)	Dimensions (±1mm)			Weight (kg)	Acid Volume (liter)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CA☆	CCA★/ -18°C
			L	W	H							
(12 VOLT)												
Conventional												
51814		19	185	82	170	4.64	1.08	1.90		3	—	150
51913		19	185	82	170	4.64	1.08	1.90		3	—	150
52015		20	185	82	170	4.64	1.08	2.00		3	—	150
52515		25	185	126	170	5.62	1.77	2.50		3	—	280
52861		28	185	126	170	5.62	1.77	2.80		3	—	280
53030		30	185	126	170	5.70	1.77	3.00		3	—	280
53034		30	185	126	170	5.70	1.77	3.00		3	—	280
53211		32	232	130	165	6.05	2.34	3.20		3	—	320
Maintenance Free, Fresh Pack												
YTX53030	53030	30	186	130	170	7.25	1.65	3.00		3	—	300
Sealed Factory Activated												
SLA-51913	51913	19	183	79	171	5.97	—	1.90		3	325	170
SLA-53030	53030	30	178	123	166	8.52	—	3.00		3	400	280
SLA-53034	53034	30	178	123	166	8.52	—	3.00		3	400	280
GEL												
GEL-51913	51913	19	183	79	171	6.04	—	1.90		3	325	170
GEL-53030	53030	30	178	123	166	8.64	—	3.00		3	390	280
GEL-53034	53034	30	178	123	166	8.64	—	3.00		3	390	280




Harley Davidson Motorcycles

Harley Davidson Motorcycles

- 100% compatible with your Harley Davidson motorcycles;
- Unique gel electrolyte, never need refilling;
- Absolutely leakage free, more than non-spillable
- Need less charging in standby or storage mode;
- Extreme vibration resistance;
- Improved charge recovery and super lifespan.



Model No.	ORINIAL HARLEY MODEL	Capactiy 10HR(Ah)	Dimensions (±1mm)			Weight (kg)	Regular Charge Current (amp.)	Assembly Figure	Terminal Type	CA☆	CCA★/ -18°C
			L	W	H						
(12 VOLT)											
YGZ14H-BS	BA14SHD	14	149	87	144	4.73	1.40	⊕ _ _ _ ⊖	21	315	180
YGZ14HL-BS	BA14LSHD	14	149	87	144	4.73	1.40	⊖ _ _ _ ⊕	21	315	180
YGZ20H-BS	BA20SHDT	19	176	87	153	6.02	1.90	⊕ _ _ _ ⊖	20	400	300
YGZ20HL-BS	BA20LSHDT	19	176	87	153	6.02	1.90	⊖ _ _ _ ⊕	20	400	300
YGZ30HL-BS	BA30LSHDT	30	166	130	175	9.18	3.00	⊖ _ _ _ ⊕	20	460	360

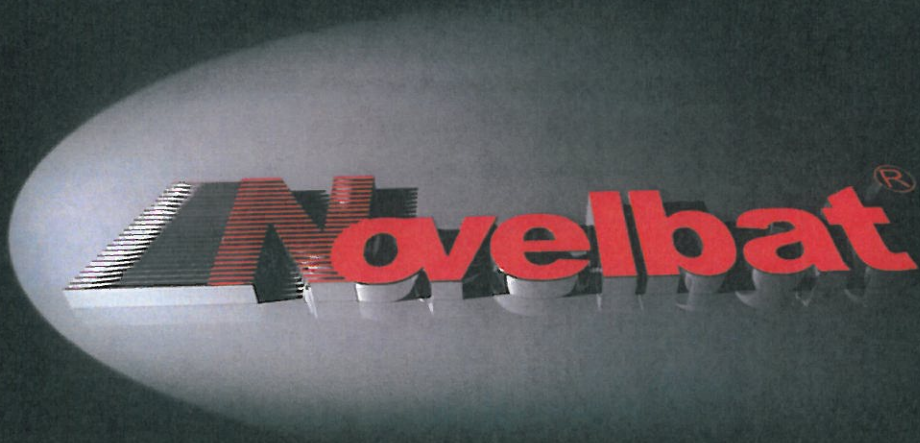

Powersports Battery